

Digital Flow Meter GLF-1000

Instant check for gas flow rate

- Handy and compact
- Wide flow rate range
- Easy to operate



Distributed by:


Lab Unlimited
CARL STUART GROUP

Tallaght Business Park
Whitestown
Dublin 24
Ireland

Tel: (01) 4523432
Fax: (01) 4523967
E-mail: info@labunlimited.com
Web: www.labunlimited.com

Digital Flow Meter GLF-1000

GL Sciences’ GLF-1000 adapts Differential Pressure (DP) method.
The GLF-1000 measures target gases accurately and instantly.
With a wide measurable range, up to 1000 mL/min, and auto power-off function, GLF-1000 brings safety and accuracy to labs.

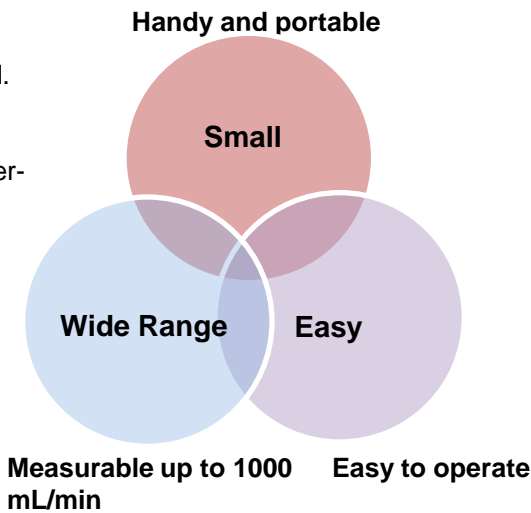


Specifications

- Gases : Helium, Nitrogen, Hydrogen, Air
※Not explosion-proof structure
- Range : 1 - 1000 mL/min
- Accuracy (He) : 5 - 50 mL/min
±10 % of flow reading or ±0.8 mL/min whichever is greater
- : 50 - 900 mL/min
±5 % of flow reading
- Temperature Range : 5 - 40 °C
- Battery : 9 volt square shape battery 1pcs
- Dimension : 80(W) × 145(D) × 38.5(H) mm
- Weights : 180 g excluding the battery
- Others : Auto power off function
Battery monitor function
CE Certified

Capillary Column Connecting Adaptor (Optional)

Connect the adaptor to the silicon tube and clamp the nut to fix the whole parts.

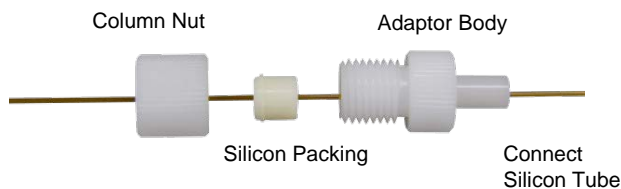

Description	Cat.No.
Digital Flow Meter GLF-1000	2709-11000
Capillary Column Connecting Adaptor	2709-55015

Distributed by:

Lab Unlimited
CARL STUART GROUP

Tallaght Business Park
Whitestown
Dublin 24
Ireland
Tel: (01) 4523432
Fax: (01) 4523967
E-mail: info@labunlimited.com
Web: www.labunlimited.com